

# Refrigeration & Air-Conditioning Technology

## Recovery & Filling

### ROREC

#### Refrigerant recovery device

Compact, portable device for recovery and recycling refrigerants of all kinds



#### Product Profile

##### KEY FEATURES

- 4-pole motor guarantees the durability of the machine
- Low noise and vibration emission thanks to the compact design
- Intuitive handling makes it simple and safe to use
- Maintenance-free operation through the oil-free compressor
- Emptying of the device in order to work with different refrigerants with the PURGE function
- Simple transport and use with the light and compact plastic casing

##### TECHNICAL DATA

<b>Suitable for:</b>	all refrigerants of the type CFC-HCFC-HFC
<b>Capacity:</b>	gaseous: 0.26 kg / min fluid: 1.85 kg / min Push/Pull: 6.22 kg / min
<b>Electrical Data:</b>	230 V / 50 - 60Hz
<b>Power:</b>	370 W
<b>High pressure switch:</b>	38.5 bar
<b>Dimensions:</b>	490 x 244 x 353 mm
<b>Weight:</b>	17 kg

**Ideal for mono & multi-split air-conditioning units and heat pumps!**

#### Integrated high pressure switch

Protects the integrated components

#### PURGE function

Emptying of refrigerant residue in the unit (self-cleaning mode)

#### Simple use

Controlled dosage of the refrigerant supply

#### RESET Button

Reset of the pressure shut-off

#### Removable cable

Prevents cable damage

#### Oil-free compressor

Maintenance-free operation

#### Thermal switch

Protects the unit from overheating

#### Light and compact plastic casing

Simple transport and use


#### 4-pole motor

Increased torque and service life




### Recovery of Refrigerant


**Exemplary:**  
Outdoor air-conditioning unit

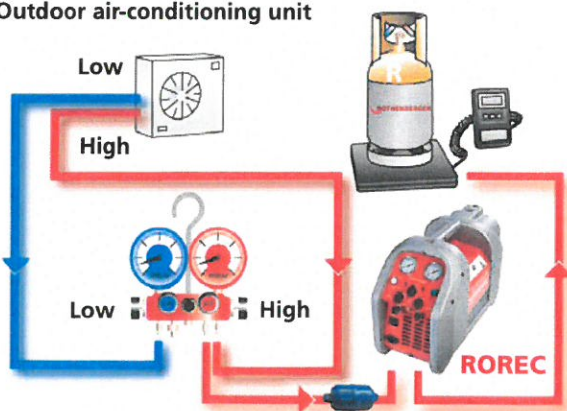

Simple and precise reading with the glycol filled pressure gauge

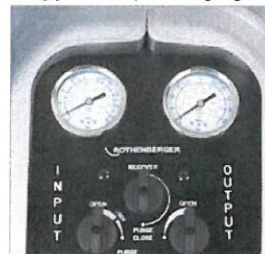

Practical storage compartment for accessories on the back



Model	Connected Load	kg	No.	No.
ROREC	370 W	17.0	1	168605
Filter		0.12	1	168713

# Refrigeration & Air-Conditioning Technology

## Recovery & Filling

### ROREC PRO

#### Refrigerant recovery device

Compact, portable device for recovery of halogenated refrigerants of every kind



#### Product Profile

##### KEY FEATURES

- Maintenance free operation with the oil-free 2-piston compressor
- 4-pole motor guarantees the durability of the machine
- Automatic shut-off after the evacuation process is finished
- Low-noise and vibration emission thanks to the compact design
- Intuitive handling makes it simple and safe to use
- Emptying of the device in order to work with different refrigerants with the PURGE function
- Simple transport and use with the light and compact plastic casing

##### TECHNICAL DATA

<b>Suitable for:</b>	all refrigerants type CFC-HCFC-HFC
<b>Capacity:</b>	gaseous: 0.52 kg / min fluid: 3.70 kg / min Push/Pull: 9.95 kg / min
<b>Electrical Data:</b>	230 V / 50 - 60Hz
<b>Power:</b>	730 W
<b>High pressure switch:</b>	38.5 bar
<b>Dimensions:</b>	490 x 244 x 353 mm
<b>Weight:</b>	19 kg

Also ideal for large facilities!

#### Control lamp

When green: Process is over - unit will turn off automatically  
When red: The system pressure is too high - unit will turn off automatically

#### Simple use

Controlled dosage of the refrigerant supply

#### PURGE function

Emptying of refrigerant residue in the unit (self-cleaning mode)

#### Removable cable

Prevents cable damage

#### Oil-free 2-piston compressor

Very high suction performance with maintenance free operation

#### Thermal switch

Protects the unit from overheating

#### Light and compact plastic casing

Simple transport and use


#### 4-pole motor

Increased torque and service life

Simple and precise reading with the glycol filled pressure gauge



Practical storage compartment for accessories on the back



ROREC PRO in use



13

Model	Connected Load	$\Delta$ kg		No.
ROREC PRO	730 W	19.0	1	168606
Filter		0.12	1	168713